

25Gb/s 100m SFP28 Transceiver (STC-80070)



Features:

- ▶ UP to 25.8Gb/s bit rates
- ▶ Hot-Pluggable
- ▶ Duplex LC connector
- ▶ 850nm VCSEL transmitter, PIN photo-detector
- ▶ Up to 100m on OM4 MMF, 70m on OM3 MMF

- ▶ 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- ▶ Cost effective SFP28 solution, enables higher port densities and greater bandwidth
- ▶ Power Supply :+3.3V
- ▶ Low Power consumption<1.2W
- ▶ Operating case temperature Range:-20~75°C
- ▶ RoHS compliant

Applications:

- ▶ 25GE SR
- ▶ eCPRI & CPRI

Part Number Ordering Information

STC-80070	SFP28 SR 100m optical transceiver with full real-time digital diagnostic monitoring , -20~75°C, 25GE
-----------	--

Description:

SWEDISH TELECOM's STC-80070 is a very compact optical transceiver module converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-SR standard. The SFP28 SR module electrical interface is compliant to SFI electrical specifications. The VCSEL transmitter and PIN receiver provide superior performance for Ethernet applications at up to 100m links on OM4 MMF.

The SFP28 Module compliant with SFF-8431, SFF-8432 and IEEE802.3by 25GBASE-SR. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

► Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	T _S	-40		+85	°C
Case Operating Temperature	T _A	-20		75	°C
Maximum Supply Voltage	V _{CC}	0		3.6	V
Relative Humidity	RH	0		85	%

► Electrical Characteristics (T_{OP} = -20 to 75 °C, V_{CC} = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{CC}	3.135		3.465	V	
Supply Current	I _{CC}			300	mA	
Power Consumption	P			1.2	W	
Data Rate	R	-	25.8		Gb/s	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Tx Input Single Ended DC Voltage Tolerance (Ref V _{ee} T)	V	-0.3		4	V	
Differential input voltage swing	V _{in,pp}	180		450	mV	2
Transmit Disable Voltage	V _D	2		V _{CC}	V	3
Transmit Enable Voltage	V _{EN}	V _{ee}		V _{ee} +0.8	V	
Receiver Section:						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V _O	180		450	mV	

LOS Fault	$V_{LOS\ fault}$	2		V_{CCHOST}	V	4
LOS Normal	$V_{LOS\ norm}$	Vee		Vee+0.8	V	4

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. LOS is an open collector output. Should be pulled up with 4.7k – 10k Ω on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

► Optical Characteristics ($T_{OP} = -20$ to $75^{\circ}C$, $VCC = 3.135$ to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ_t	840	850	860	nm	
spectral width	$\Delta \lambda$			1	nm	
Average Optical Power	P_{avg}	-8.4		+2.4	dBm	1
Laser Off Power	P_{off}			-30	dBm	
Extinction Ratio	ER	2.0			dB	
Receiver Section:						
Center Wavelength	λ_r	840	850	860	nm	
Receiver Sensitivity(OMA)	S_{en}			-5.2	dBm	2
Los Assert	LOS_A	-30		-	dBm	
Los Dessert	LOS_D			-11	dBm	
Los Hysteresis	LOS_H	0.5		5	dB	
Overload	Sat	3.5			dBm	3

Note:


1. Average power figures are informative only, per IEEE802.3by.
2. Receiver Sensitivity is information. Shall be measured with conformance test signal for BER=5E $\times$ 10-5
3. Receiver overload specified in OMA and under the worst comprehensive stressed condition.
- 4.

► Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t_{off}			100	us
TX_Disable Negate Time	t_{on}			2	ms
Time to Initialize 2-wire interface	$t_{2w_start_up}$			300	ms
Time to Initialize	t_{start_up}			300	ms
Time to Initialize cooled module and time to power up a cooled module to Power level II	$t_{start_up_cooled}$			90	s
Time to Power Up to Level II	t_{power_level2}			300	ms
Time to Power Down from Level II	t_{power_down}			300	ms
Tx_Fault assert	Tx_Fault_on			1	ms
Tx_Fault assert for cooled module	$Tx_Fault_on_cooled$			50	ms
TX_FAULT Reset	t_{reset}	10			us
Rx_LOS assert delay	t_{los_on}			100	us
Rx_LOS negate delay	t_{los_off}			100	us

Pin Assignment:

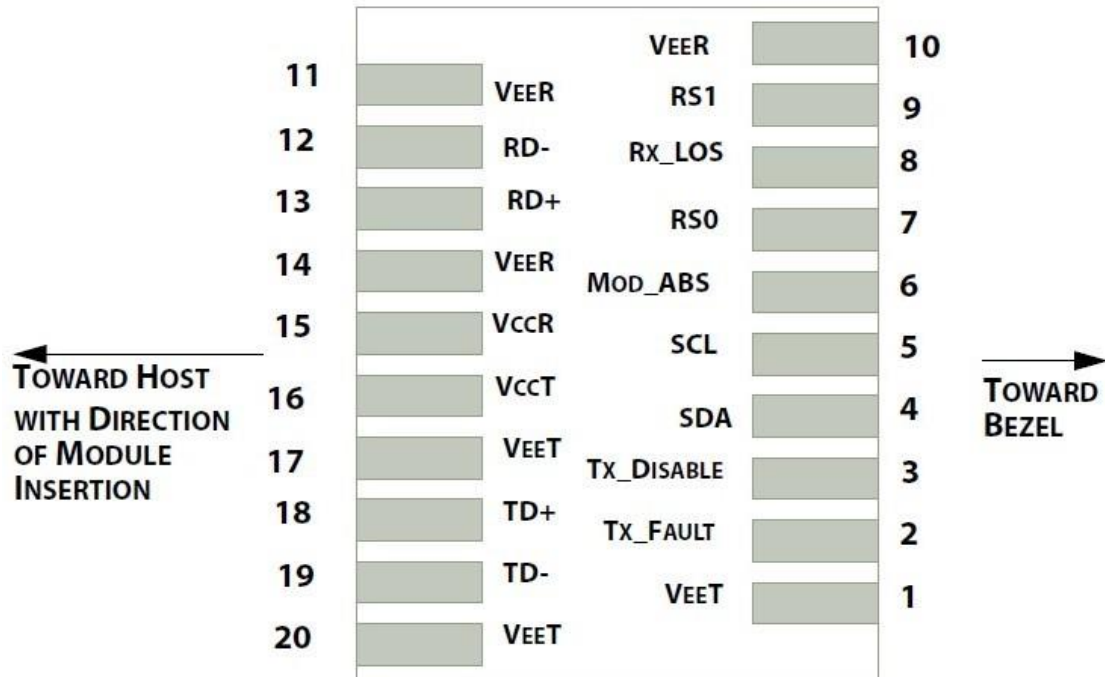Diagram of Host Board Connector Block Pin Numbers and Name




► Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module	
8	LOS	Receiver Loss of Signal Indication	
9	RS1	Rate select1: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1

Note:

1. The module ground pins shall be isolated from the module case.
2. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.
3. This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
4. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

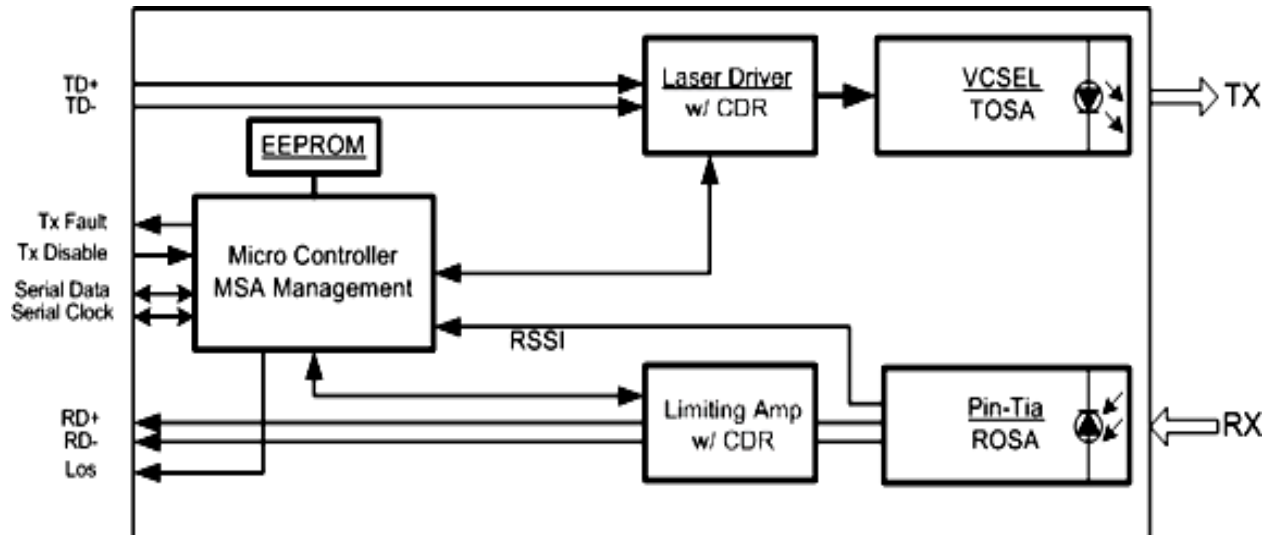► Transceiver Block Diagram



► SFP Module EEPROM Information and Management


The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I²C interface at address A0h and A2h.

The memory is mapped in Table 1.

Detailed ID information (A0h) is listed in Table 2.

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

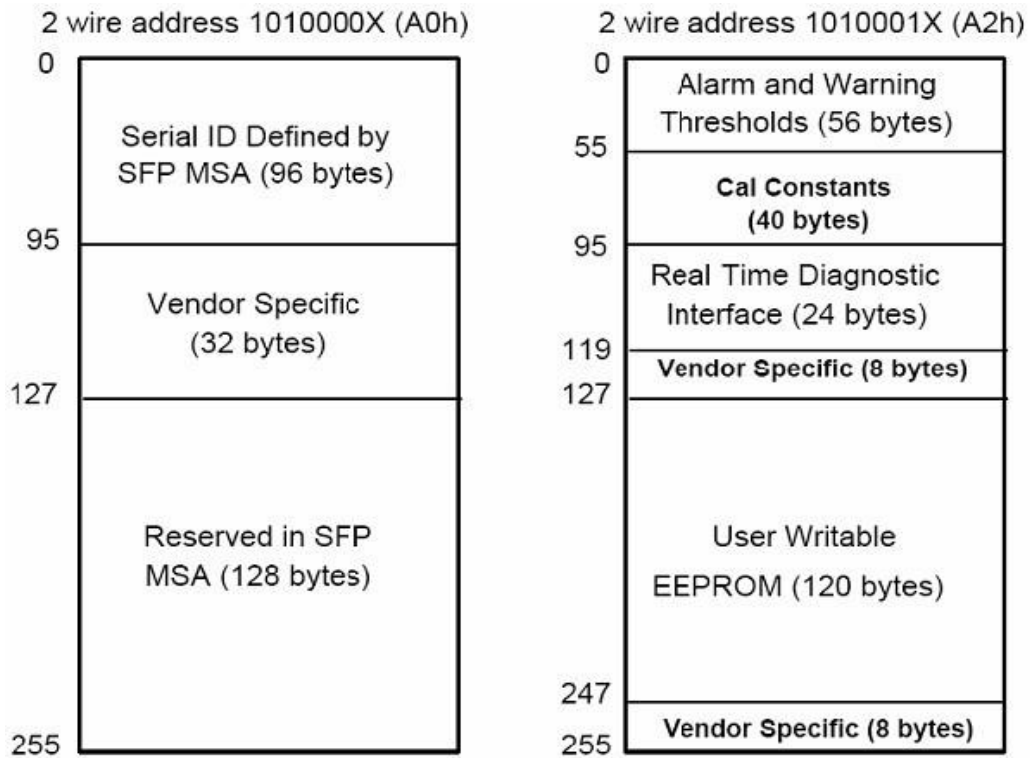Table 1. Digital Diagnostic Memory Map (Specific Data Field Descriptions)

Table 2 - EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	25G Base-SR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: SWEDISH TELECOM
36	1	Reserved	

37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: “STC-80070” (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	SWEDISH TELECOM’s Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	SWEDISH TELECOM specific date, read only
128-255	128	Reserved	Reserved for SFF-8079

Digital Diagnostic Monitor Characteristics


Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±5.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±10	%
102-103	Tx Output Power	±3.0	dBm
104-105	Rx Input Power	±3.0*	dBm

Regulatory Compliance

The STC-80070 complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).


Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22A) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laser product.

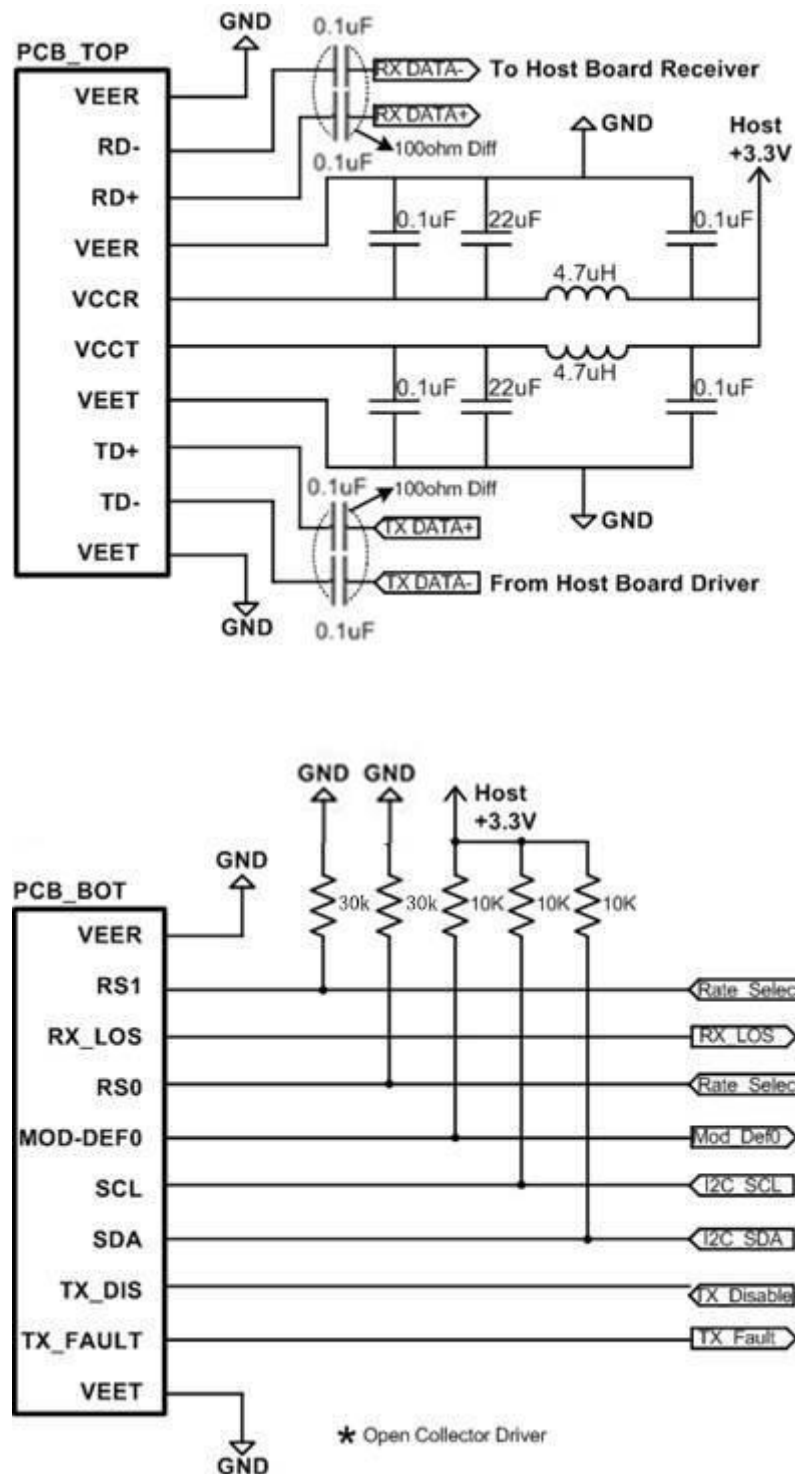Recommended Circuit:



Recommended High-speed Interface Circuit

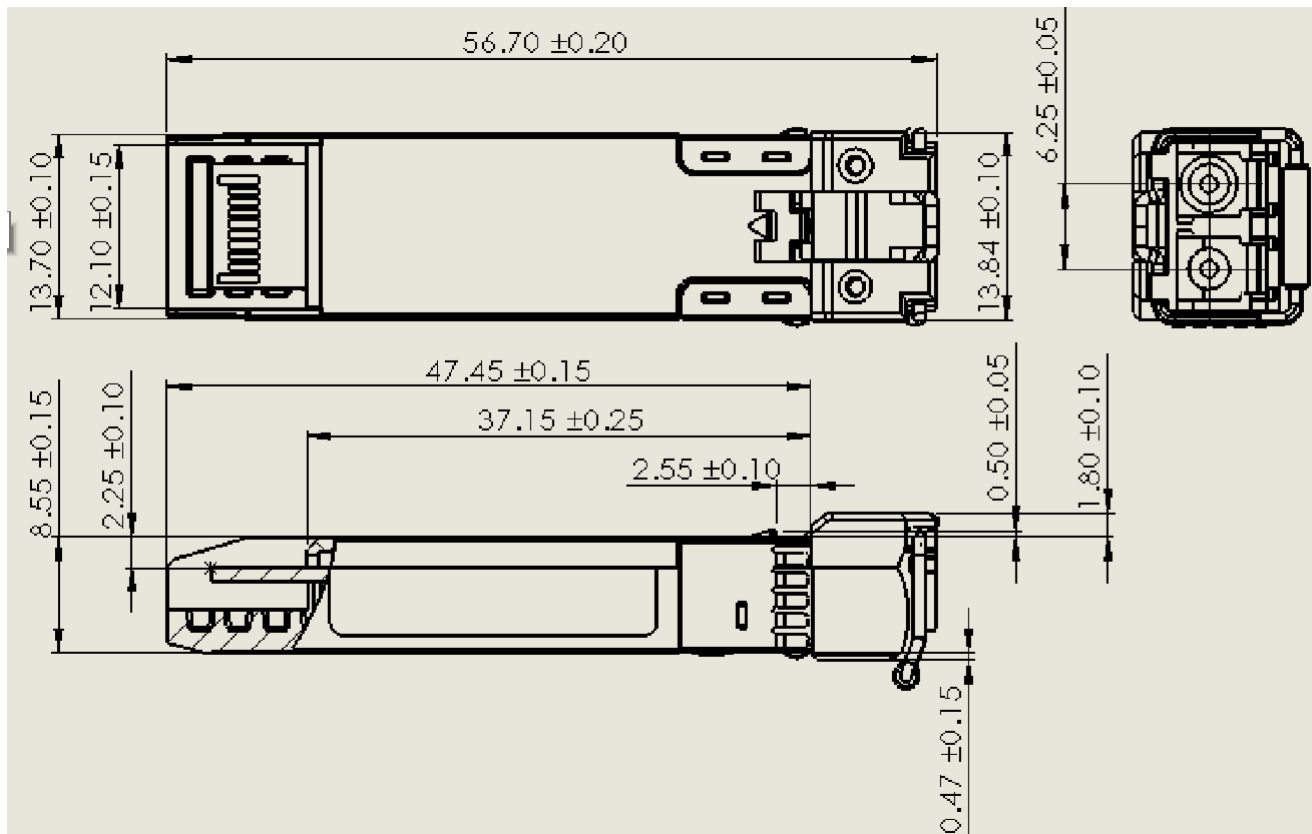Mechanical Dimensions:



SWEDISH TELECOM reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by SWEDISH TELECOM

Copyright © SWEDISH TELECOM

All Rights Reserved